

STIKfit

premium contract double stick underlay

Technical Specifications

Stikfit is a commercial crumb rubber underlay for heavy contract installations. Manufactured using a high content of recycled vehicle tyres bound in a unique latex formulation **Stikfit** delivers exceptional resilience and durability.

This product is ideal for commercial double stick applications where superb performance is required, such as hotels, schools, offices and any large contract carpet area. It also provides exceptional performance and comfort for high traffic areas in domestic situations and offers excellent recovery from indentations from loads such as heavy furniture.

Stikfit has a unique top layer which has been designed from feedback from installers, giving them a better surface to cut and apply adhesive to, without snagging or fraying, thereby reducing installation times and improving the quality of the finish.



100% recycled & recyclable



manufactured in the UK



excellent load recovery



extends carpet life




superior sound insulation (30 dB)



exceptional durability



designed for speedy laying

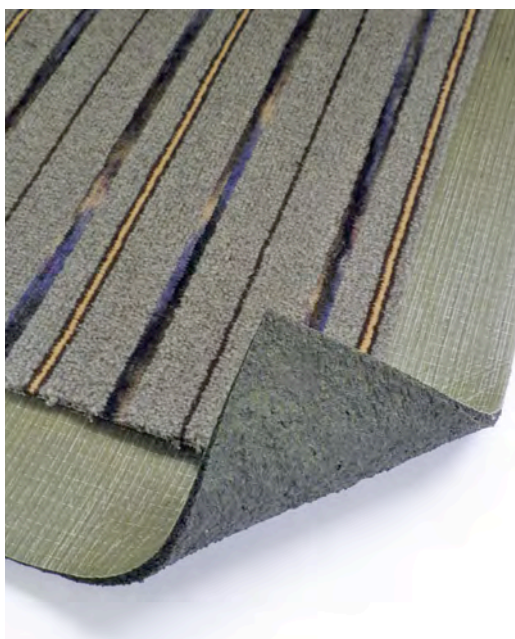

Usage Classification	Heavy Contract	BS 5808: 1991
Roll Width	1.37m	BS 5808: 1991
Roll Length	11.0m	BS 5808: 1991
Sq Metres per roll	15.07m ²	BS 5808: 1991
Thickness	6.5mm	BS 4051: 1987
Weight	c. 2.65kg/m ²	
Roll Weight	c. 40kgs	
Work of compression after dynamic loading	95J/m ²	BS 4098: 1975
Retention of work of compression	97.0%	BS 4098: 1975
Compression after dynamic loading	2.6mm	BS 4098: 1975
Thickness loss after dynamic loading	3.1%	BS 4052: 1987
Thickness loss after static loading	3.1%	BS 4939: 1987
Breaking Strength (length)	530 N	BS 2576: 1986
Breaking Strength (width)	180 N	BS 2576: 1986
Extension under force (length)	1.8%	BS 2576: 1986
Extension under force (width)	1.8%	BS 2576: 1986
Resistance to cracking Pass		BS 5808: 1991
Resistance to bacteria	Biocide added	
Flammability	Low radius of effects of ignition	BS 4790: 1987
Acoustic Properties	30 dB 140-8: 1998	BSEN ISO
Sound Absorption	0.20	BS 3638: 1963
Tog Rating	1.11	BS 4745: 2005

Transfloor

tel: 01254 54115 fax: 01254 582632

email: underlay@transfloor.co.uk